


Preferred Pack[®]

The New Industry Standard for Quality and Reliability

PP-5600 ECONOMY COMBINATION SYSTEM

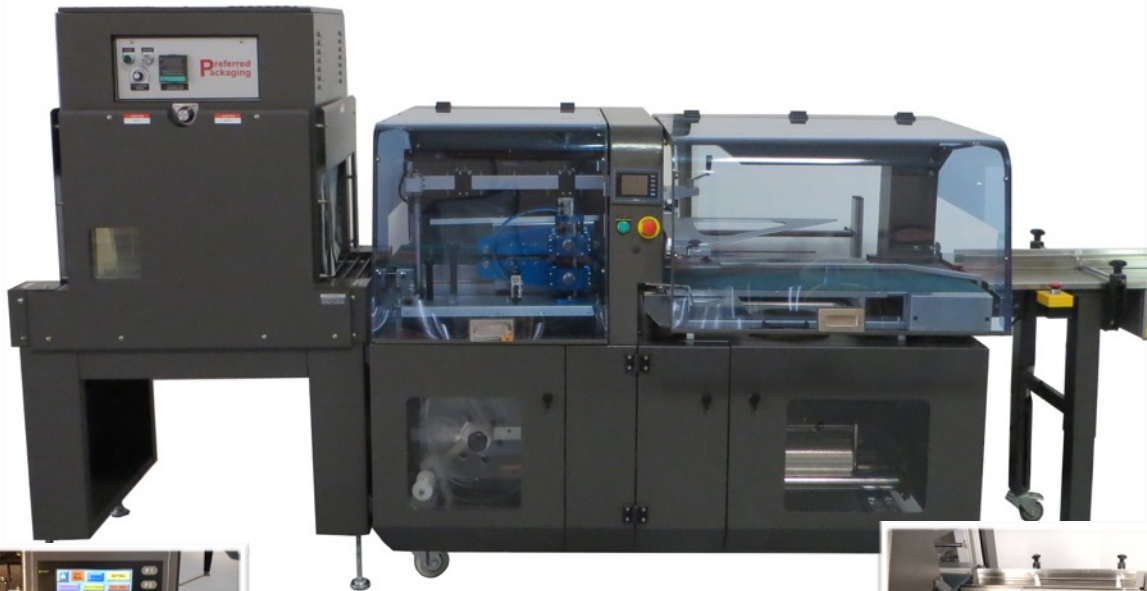

Delta touchscreen with
10 program memory

PP-5600 Economy Automatic L'Sealer and Shrink Tunnel Compact - Portable - Affordable



Optional 3' or 6' flighted or belted
infeed conveyor - increases speed

The new PP-5600 E-Combo is a fully automatic l'sealer and PP1808-28 tunnel that is sold as a set or individually. This lower cost, entry level, fully automatic system is great for customers who have one or two semi automatic l'sealers now and need more speed or want to automate without spending a lot of money.

Automatic L'Sealer Features

- Speeds up to 20-25 PPM
- Vertical seal head design
- Fast product changeovers
- "Single Piece" hot knife seal blade
- 5" Color Touch screen control panel
- Fixed speed drive 70 FPM
- Delta PLC with 10 program memory
- Pin wheel hole punch
- Front load film cradle
- Seal area 25" x 19" x 4"
- Emergency stop switch
- Self Contained scrap removal system with built-in alarm when full
- Infeed and discharge plexiglass safety covers exceed OSHA standards

Shrink Tunnel Features

- Lighted viewing window
- Chamber size 18"Wx8"Hx28"L
- Energy efficient
- 1/2 HP blower motor
- Fully re-circulating air chamber
- Live roller rod conveyor
- Digital temperature controller programmable 0 to 400 degrees
- 7.5KW heater bank
- Variable speed drive 0-110 FPM
- Solid state digital temperature controller
- Automatic cool down and shut off
- CE Approved safety system Exceeds OSHA safety standards


Fully Automatic Combination L'Sealer and Tunnels



Re-circulating air chamber with live roller conveyor



Easy front load film cradle with pin wheel hole punch

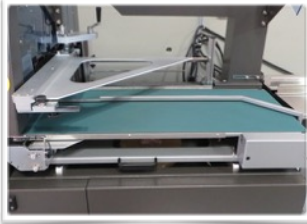

Adjustable inverting triangle for pkg height adjustment



Access fuse screen from front control panel for easy diagnostics



Vertical seal head with one piece seal knife and blade

Model	PP-5600E
Seal Area	25"L x 19"W x 4"H
Machine Speed	Up to 20PPM-25PPM
Electrical	220V, 1 Phase, 10 AMP
Air	1CFM @80 PSI
Minimum pkg size	2.5" x 2.5" x 1/8"
Maximum pkg size	25"L x 19"W x 4"H
Maximum Film width	24"
Tunnel dimensions	28"L x 19"W x 8"H
Created dimensions	108"L x 46"@ x 66"H
Shipping weight	2,000 lbs
Warranty	1yr on parts - 2yrs on seal head

Available Options
• Pneumatic hole punch
• 3' flighted infeed
• 6' flighted infeed
• 3' or 6' belted conveyors
• Flight bar conveyors for multi-packs
• Closing conveyor
• Print registration

PP-5600E Dimensions

